

Voniko®

POWER THAT GOES WITH YOU



✉ info@akinfos.com
🌐 www.akinfos.com

AK INFOS LLC
DIP-1, DUBAI, UAE.
Contact - 04 220 2200.



The ten-year shelf life means you can store them until you need them, and we make them without lead, cadmium, or mercury, all encased in a leakproof shell.

They will work for just about everything: remotes, clocks, game controllers, toys, flashlights, and appliances.

POWERS A VARIETY OF DEVICES

Provides ample energy, even for devices that use a lot of power



QUALITY YOU CAN TRUST

Coated in stainless steel to reduce rust corrosion



Mercury



Anti-leakage



Lead



Our batteries are free of lead, cadmium, and mercury, and they're protected by double-barrier leak protection, which protects you, your appliances, and the earth.

WORKS IN EXTREME TEMPERATURES


Coated in stainless steel to reduce rust corrosion



Difference thickness tech



Pressure Expansion Seal

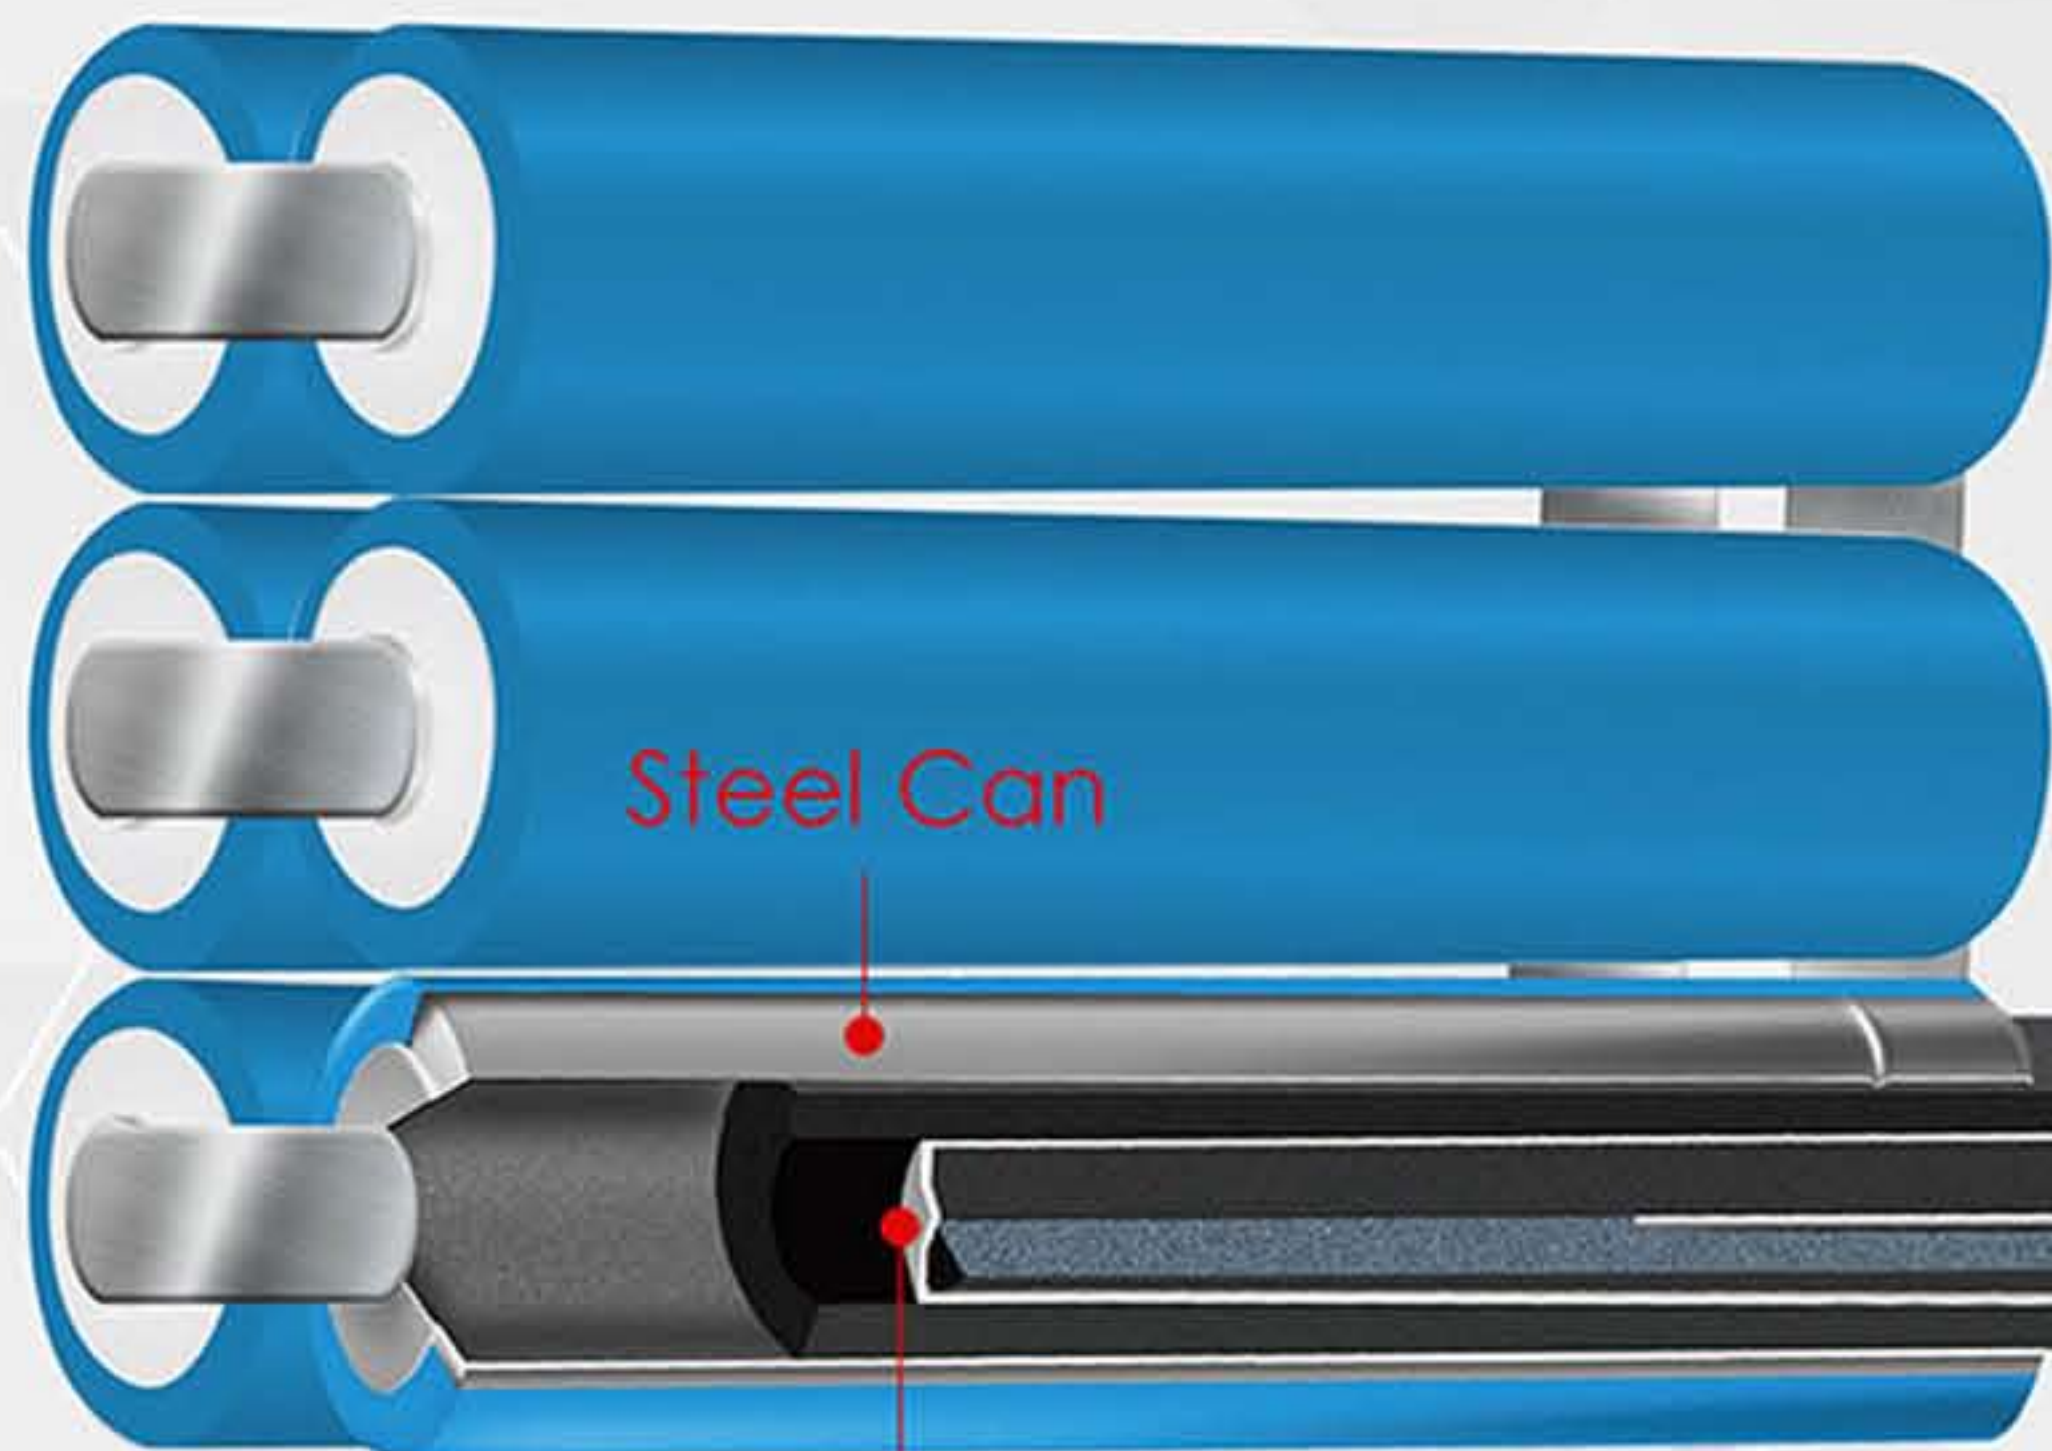

Steel Can

Ion Conducting Separator


Protective Gasket

PROVEN PERFORMANCE

10 year guarantee in storage

40%


Discharge time is 40% longer than other brands

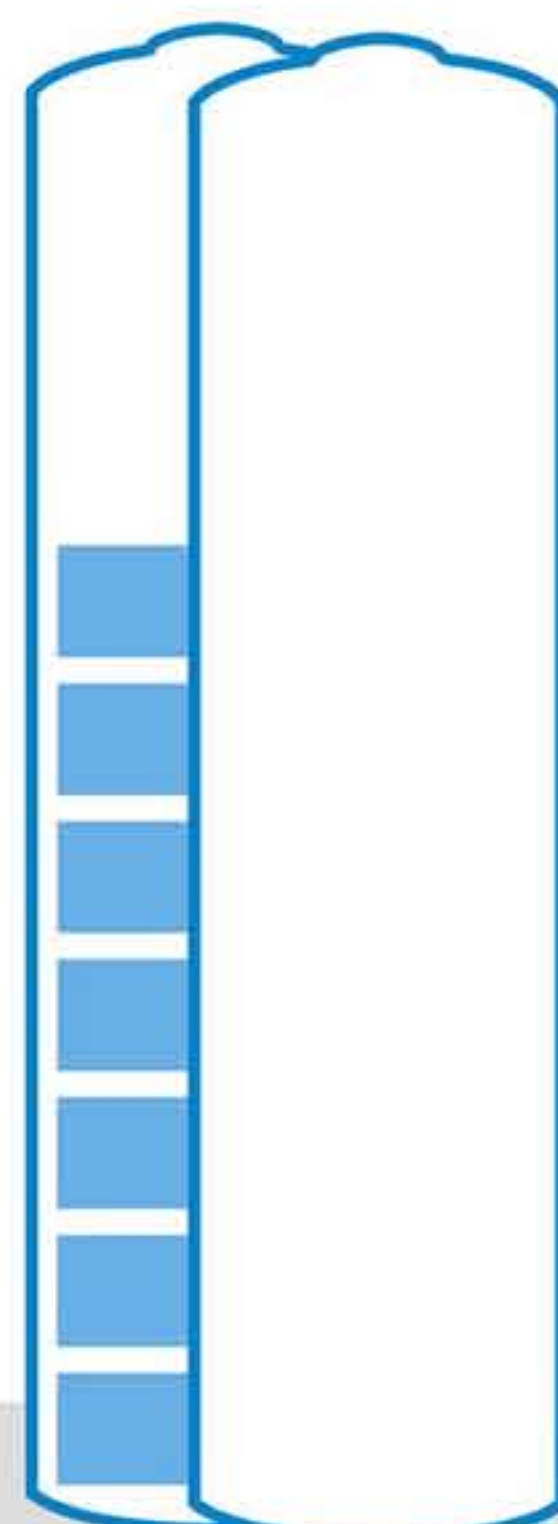

PERFORMS IN EXTREME TEMPERATURES



122°F

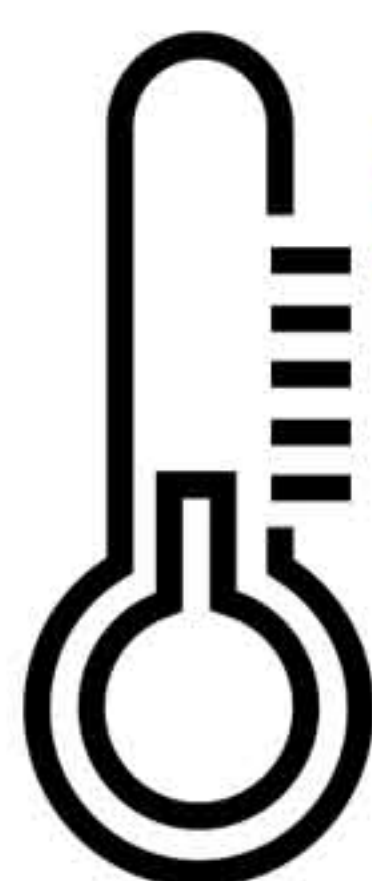

-0.4°F

PROVEN PERFORMANCE

Discharge time is 40% longer than other brands



+ 40%




ANTI-LEAKAGE PROTECTION HOLDS IN POWER









Designation	ANSI-15A, IEC-LR6
Nominal voltage	1.5V
Approximate weight	23.5g
Approximate capacity	2950mAh (10mA,24h/d, 20°C, e.v.=0.8V)
Approximate volume	8.1cubic centimeters (0.5 cubic inch)
Terminals	Flat
Recommend storage temperature	Not exceed 30°C (86°F)
Operating temperature range	-18°C to 55°C (0°F to 130°F)
Heavy metal contents	Hg≤1 ppm,Cd≤20ppm,Pb≤40ppm
Shelf life	10 years (20±2°C, RH90%)

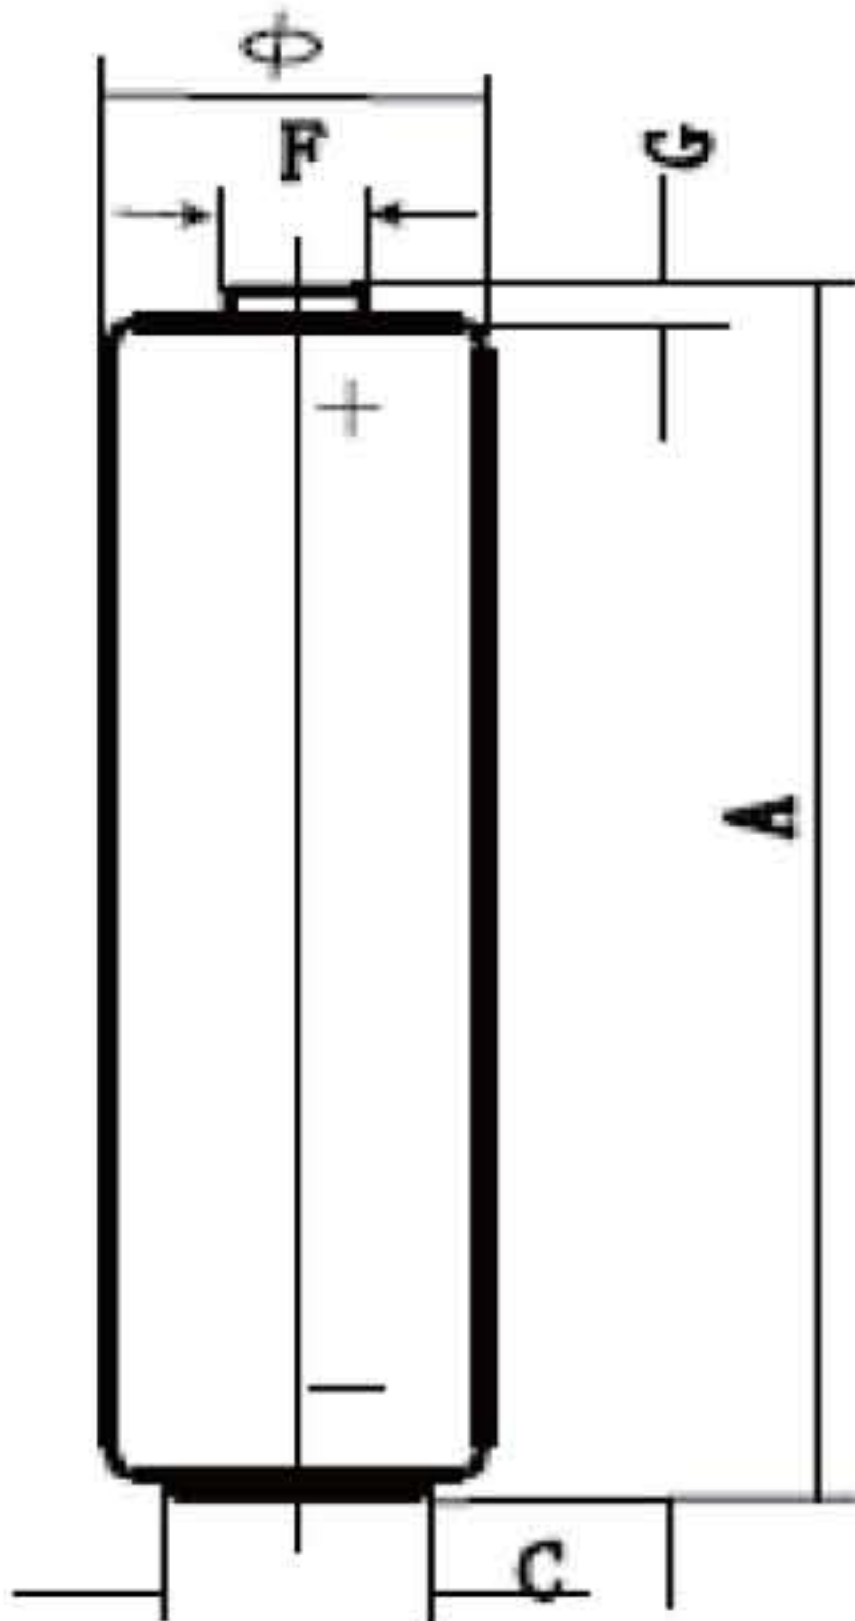

Dimensions(mm)

/	min	max
Φ	13.9	14.4
A	49.9	50.4
C	7.0	-
F	-	5.5
G	1.0	-

WARNING: Insert correctly(+/-). Do not recharge, disassemble,short-circuit, dispose of in fire or solder on batteries. Do not mix new and used batteries, different chemistries or brands that may explode, leak and cause damage. Dangerous if swallowed and go to hospital immediately!

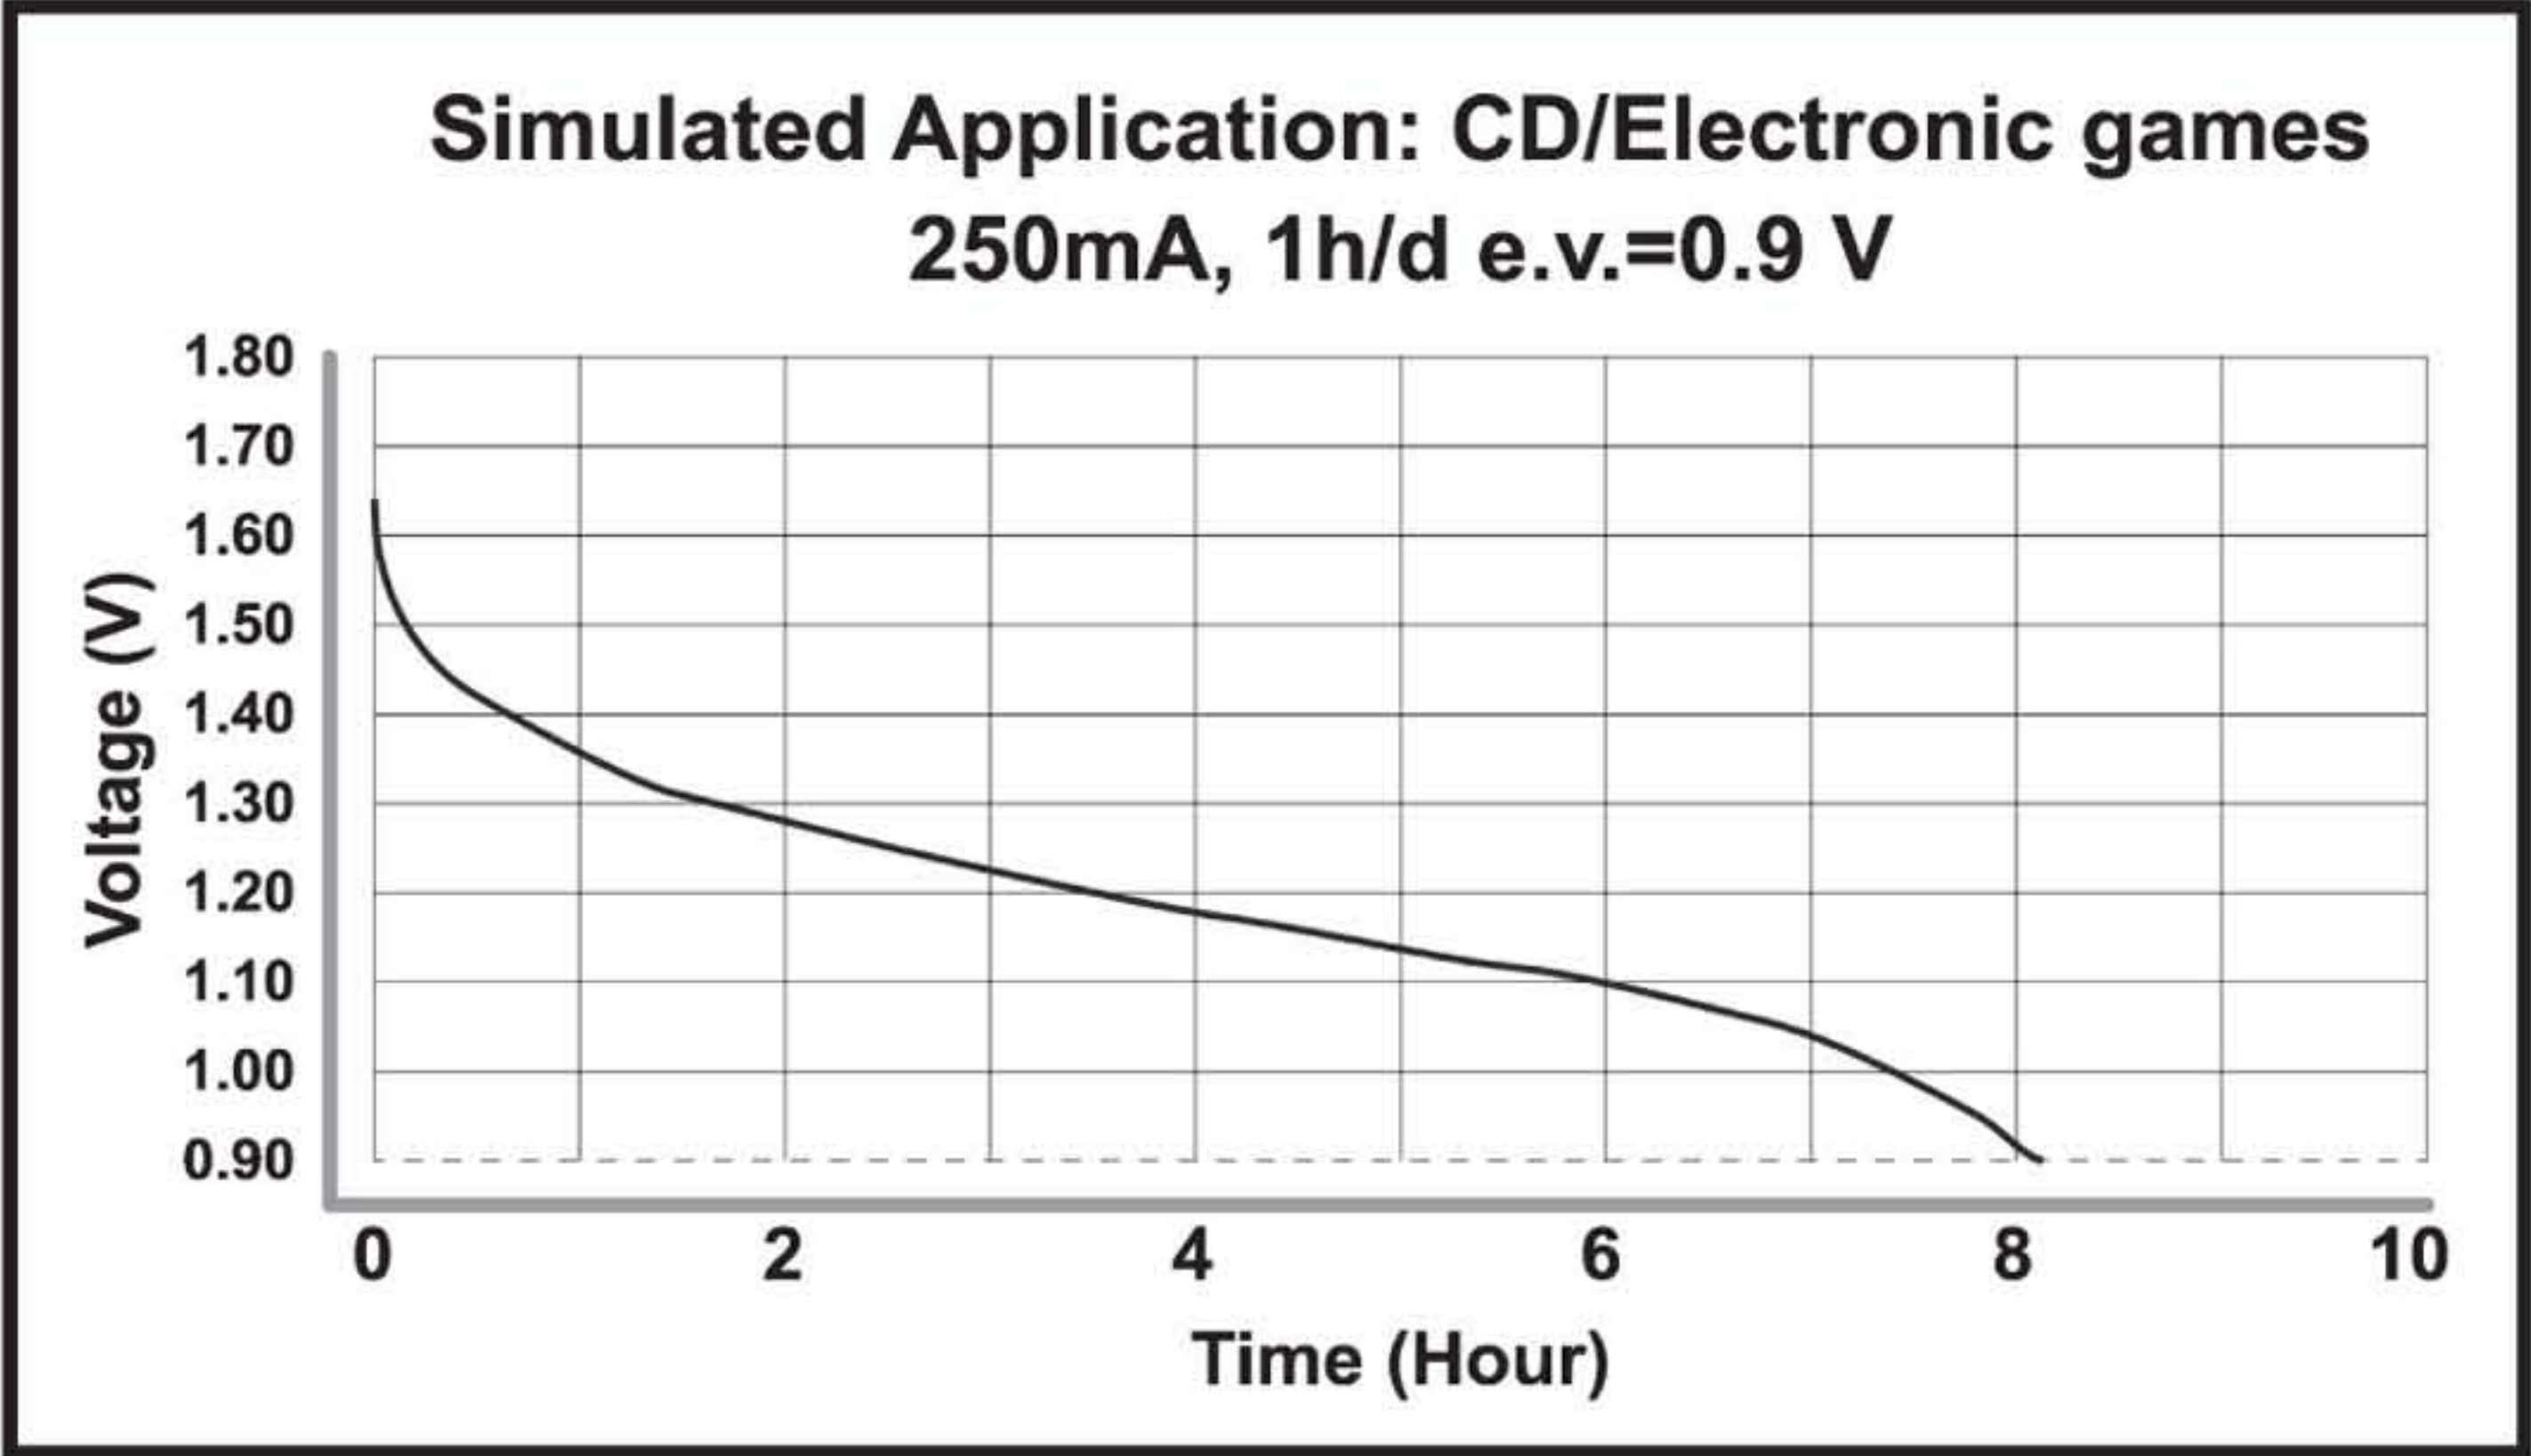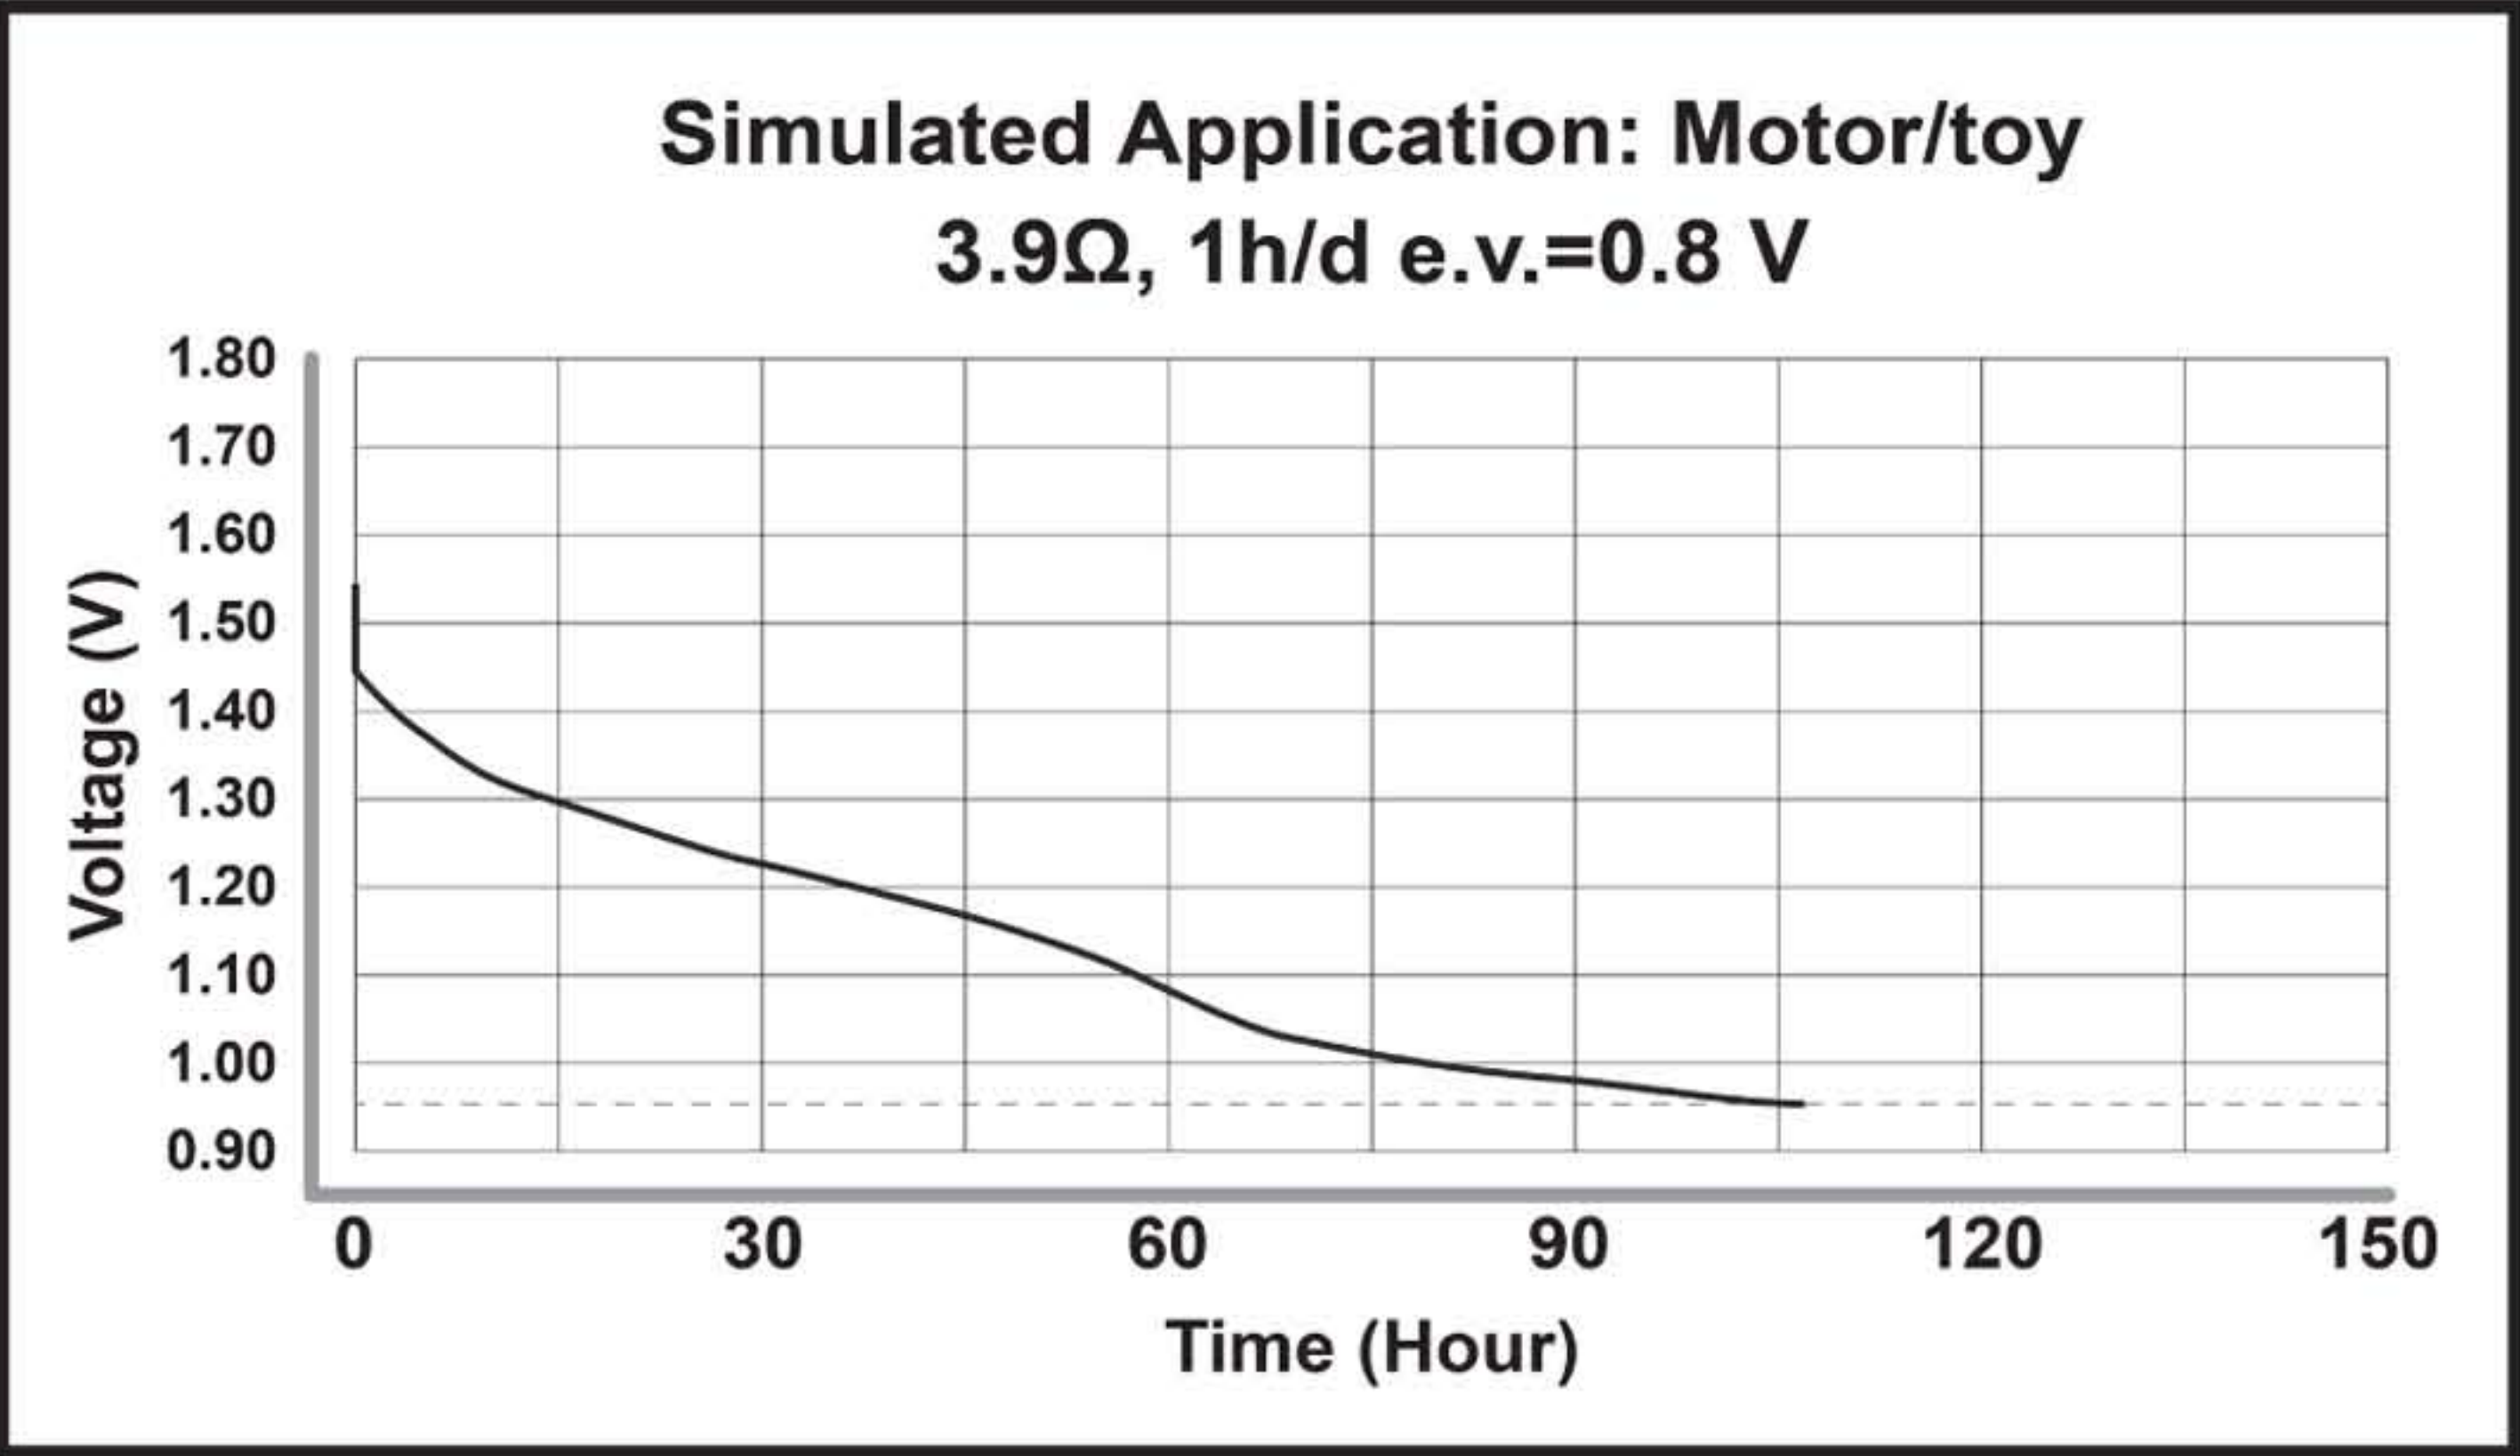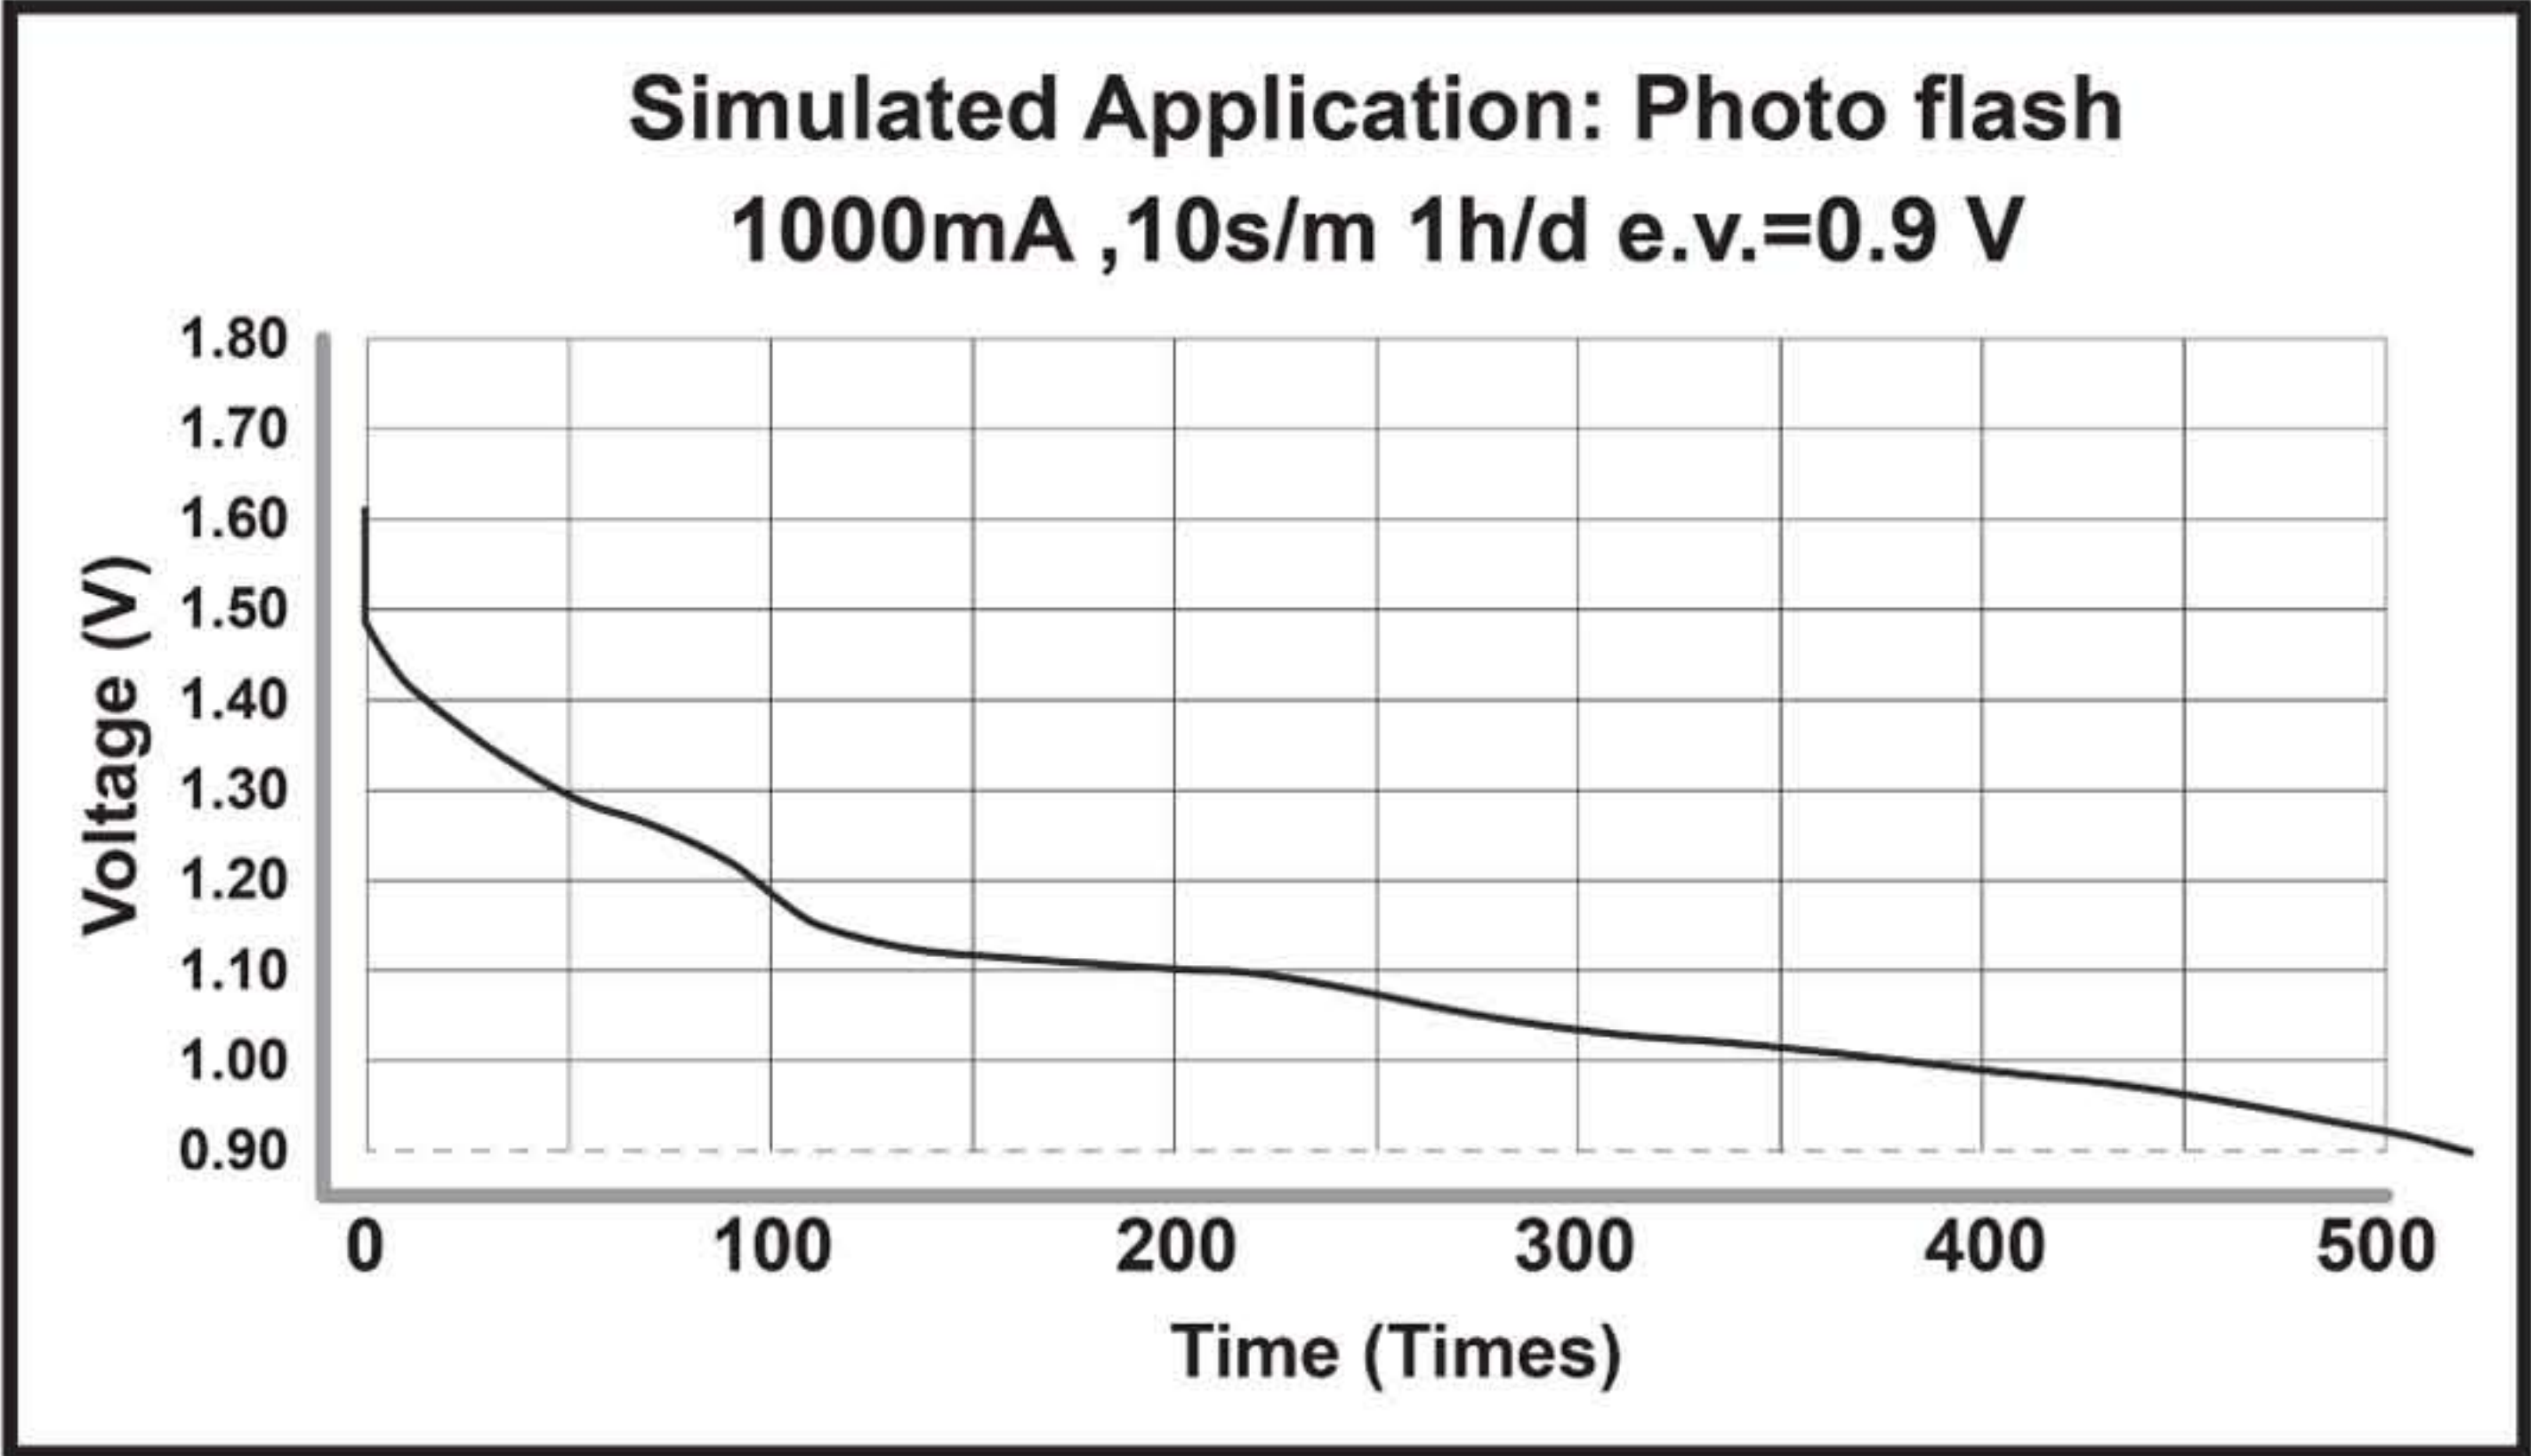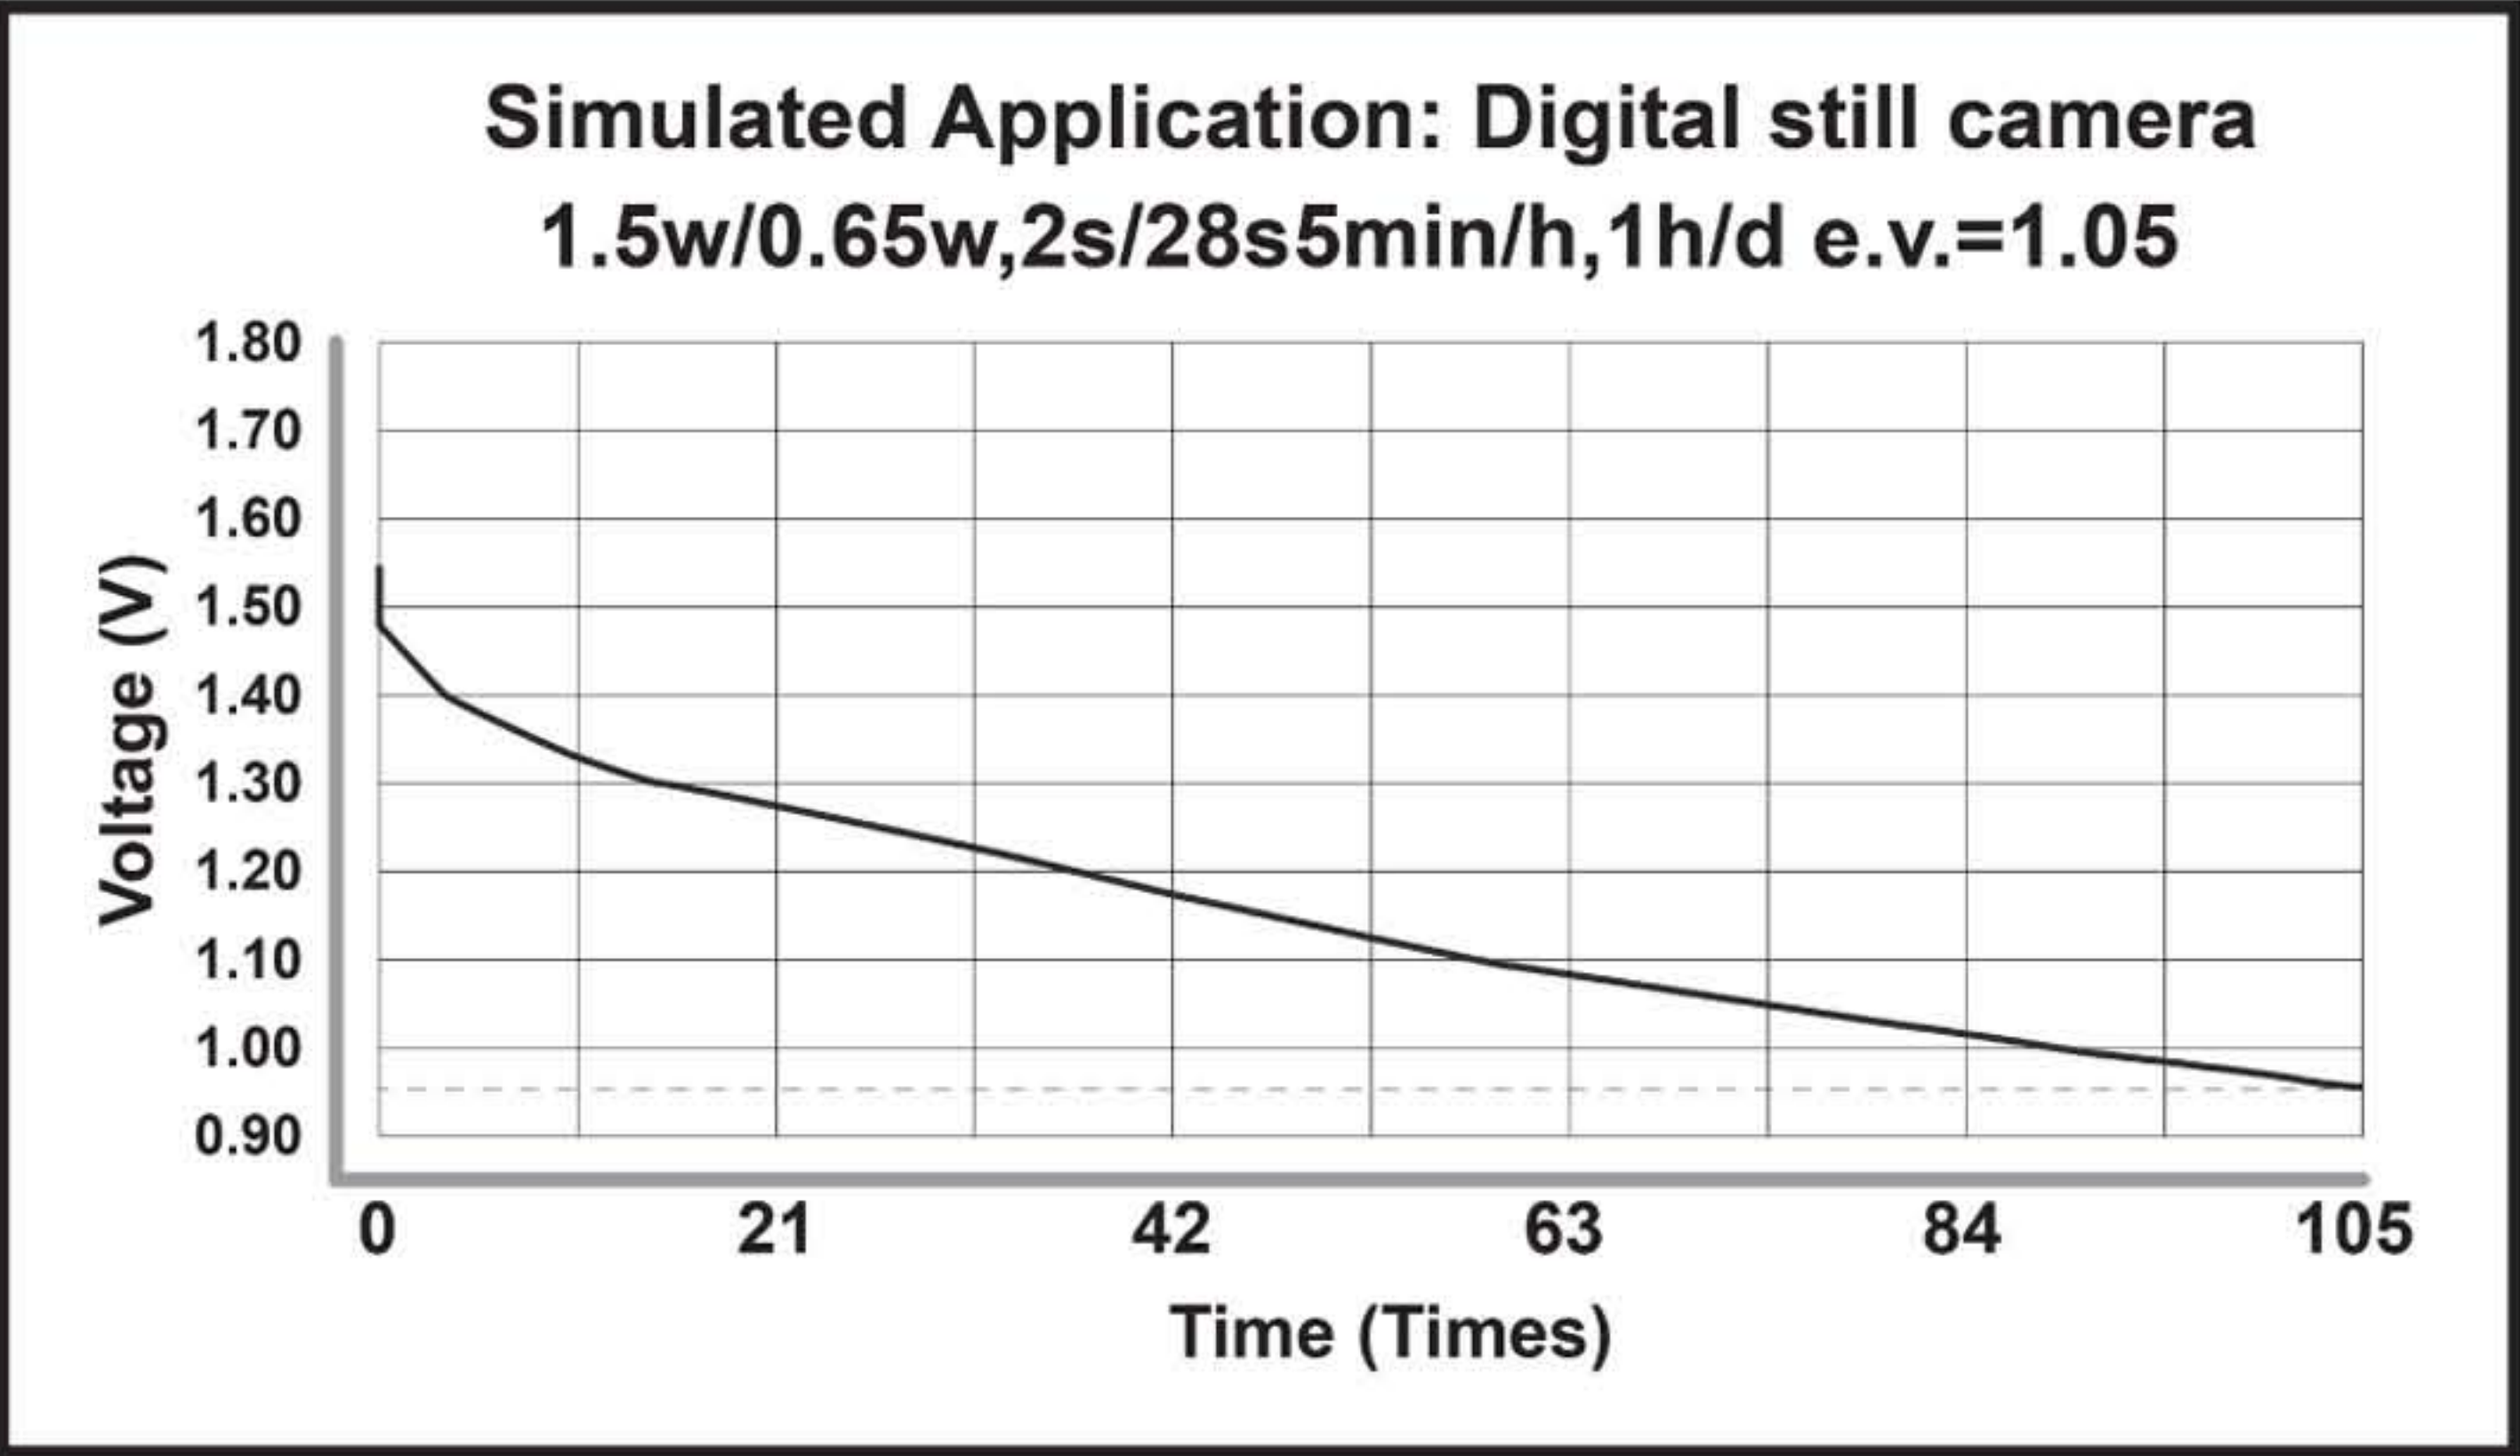


TECHNOLOGICAL INNOVATION




Difference thickness tech

- Increase the useage of EMD in new battery in order to enhance the performance.

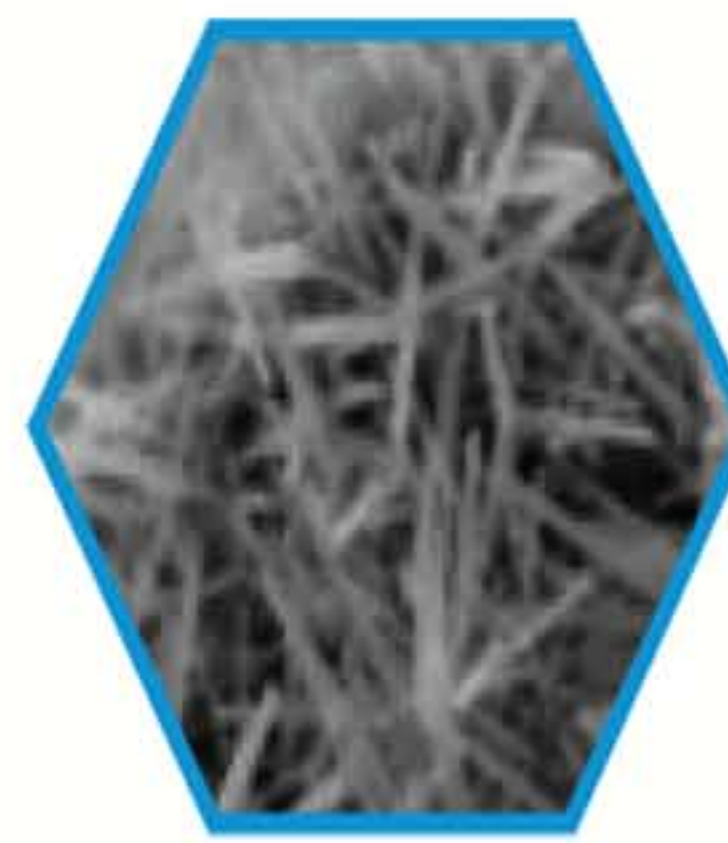

New Zinc

- Much loose network structure, ensure full reactions and brings better discharge ability.
- Special additives increase the material activity, and greatly strengthen the medium-drain and low-drain performance.

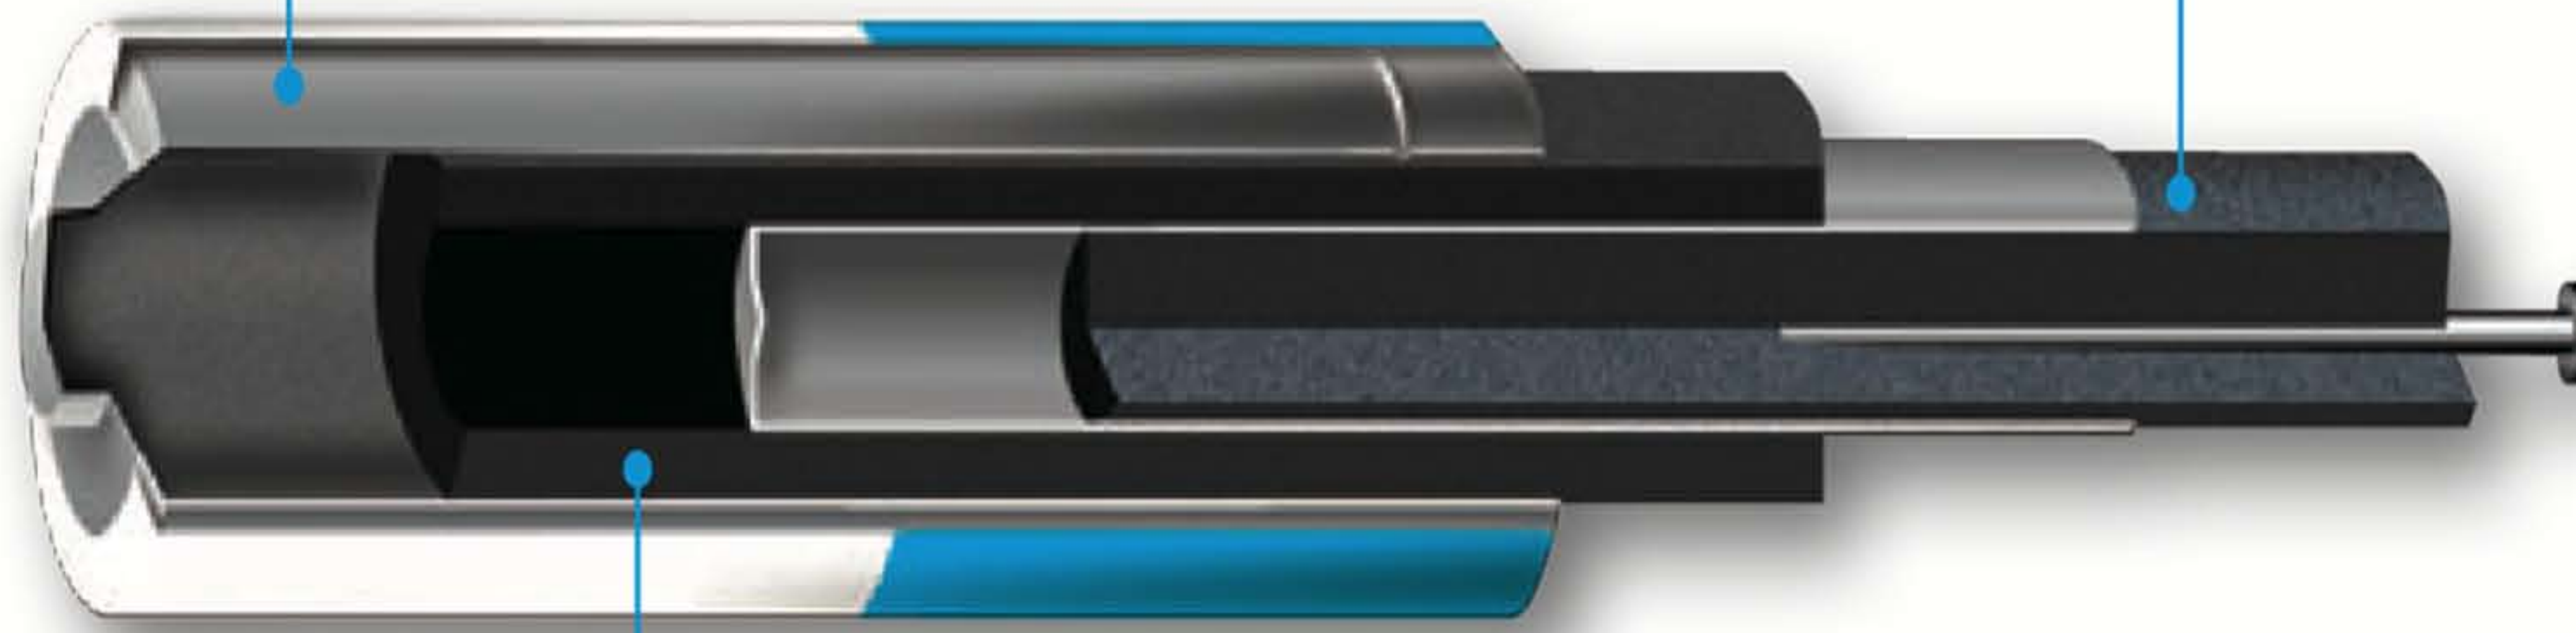

SCM Technology

- Super Conducting Material (SCM Technology)makes incredible high capacity.



Patented Nylon Gasket

- More stronger alkali resistance, aging resistance with outstanding safety performance.
- Better leakage proof performance with patented Nylon Gasket.

HELPS YOU PERFORM THE BEST

Anti-Leakage Protection | Holds in Power

For up to 10 Years | In storage under normal usage

